

# 2014 TOOLS CATALOG





## TOOLS

Electrical Tools AWP .....	5-10
Electrical Tools General Usage .....	11-18
Miscellaneous Tools AWP .....	19-21
Miscellaneous Tools Telehandler .....	22
Miscellaneous Tools General Usage .....	23-26
Hydraulic Tools AWP .....	27-28
Hydraulic Tools General Usage .....	29-31
Hydraulic Tools Telehandler .....	32-34
Drive Train Tools AWP .....	35
Drive Train Tools Telehandler .....	36-48





## Tools

At JLG our goal is to help make your work easier. We offer a full line of tools to help increase your productivity. The factory approved tools offered by JLG will help you get your equipment back on the job site quicker. We offer a long list of electrical, hydraulic, drive train, and general shop tools to help keep your equipment running.

### How to Order

- Visit us online at [onlineexpress2.jlg.com](http://onlineexpress2.jlg.com)
- Call us at 1-877-554-5438
- Fax your order to 1-800-733-8939

**Item No. 2901443****JLG Hand Held Analyzer**

The Analyzer Kit is essential for programming and troubleshooting JLG aerial work platforms. This is a must-have tool for any service technician.

Model Usage: JLG AWP's featuring ADE

**Features/Benefits**

- Compact size tool that you can carry with you to your job site
- Quick diagnostic for fault codes
- Adjust machine parameters on the job site
- Enable and disable machine features
- Configure new options
- High contrast LCD screen
- Kit includes Analyzer, Communication Cable, and Instruction Guide

**Item No. 1600303****OEM Optimizer Controller**

The optimizer is used to calibrate and configure settings on OEM Controllers utilized on JLG 600SC Machines.

Model Usage: Pre-ADE JLG 600SC and 660SJC

**Features/Benefits**

- Separate adjustments for all four channels
- Separate adjustments for each direction of handle movement
- Default settings with the touch of a button
- Adjustments can be made from the platform or ground
- Pre ADE

**Item No. 2900832****Calibrator**

The Calibrator provides visibility to system information and enables you to adjust the speed or percentages of all functions to meet the required specs.

Model Usage: JLG 3369E, 3969E, 30E, 35E, 40E, 45E

**Features/Benefits**

- Allows for machine parameters to be adjusted on the job site
- The Calibrator is necessary to program earlier model JLG electric machines including 3369/3969E and the 30/35/40/45E machines
- Utilizes 4 buttons to complete machine set up





**Item No. 7025944****Oscilloscope**

The auto setup function takes care of all the necessary settings and makes the measuring of waveforms another time saving step for your service technician.

Model Usage: All JLG Equipment

**Features/Benefits**

- Up to 2 MHz analogue bandwidth
- 5 mV to 20 V/div in 12 steps
- 200 ns to 1 hour/div time base in 32 steps
- Trigger Mode: run, normal, once, roll, slope +/-
- Frequency readout (through markers)
- High contrast LCD screen

**Item No. 1060629 (Serial Ports) or 1001137005 (USB Ports)****Nine Pin Serial Plug Cable**

The Serial Plug Cable can be used on all JLG AWP's to download software or PC analyzer software.

Model Usage: All JLG AWP's

**Features/Benefits**

- Needed tool to connect PC to the JLG AWP
- This cable is a must have to be able to configure machine settings and options



 The cable shown is for computers with serial port plug ins. JLG also offers cable PN 1001137005 for computers using USB style cable ports.

**Item No. 4921299****Nine Pin Test Harness**

The Nine Pin Test Harness was developed as an alternative to using multiple jumper wires to adjust the settings of a PQ controller.

Model Usage: JLG AWP's using PQ Controllers

**Features/Benefits**

- Factory Approved Test Harness
- More convenient than using jumper wires to change the settings on a PQ Controller.



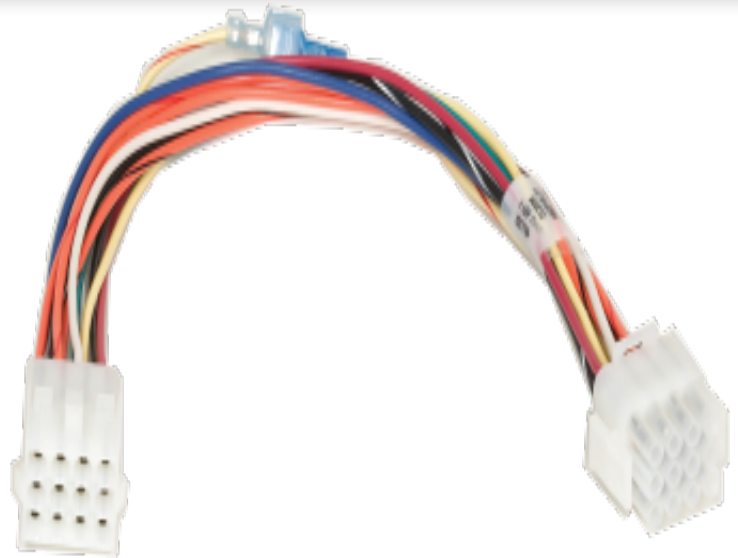
**Item No. 4921300****Twelve Pin Test Harness**

The Twelve Pin Test Harness was developed as an alternative to using multiple jumper wires to adjust the settings of a PQ controller.

Model Usage: JLG AWP's using PQ Controllers

**Features/Benefits**

- Factory Approved Test Harness
- More convenient than using jumper wires to change the settings on a PQ Controller.

**Item No. 4922012****Rexroth Harness**

The Rexroth Harness is used to make adjustments on Rexroth Control Cards in the platform control box.

Model Usage: JLG 400S/460SJ; 600S; 601S; 800A/AJ

**Features/Benefits**

- Harness includes wire, plug, housing, pins, and sockets
- Factory recommended and approved tool

**Item No. 4923341****Outrigger Jack Harness**

The Outrigger Jack Harness is an accessory harness used to retract the outriggers on JLG T350/T500J

Model Usage: JLG T350/T500J

**Features/Benefits**

- The outrigger jack harness is a complete harness with a push-button switch to activate the outriggers
- Always refer to the machine service manual before using this harness and completing repair work



**Item No. 4460510****Pin Extraction Tool**

The Pin Extraction Tool is used to remove pin and socket contacts from Deutsch (Cannon) style connections.

Model Usage: JLG AWP's and Deutsch Connections (Cannon Plugs)

**Features/Benefits**

- Designed for 12-14 gauge terminals
- Allows for Deutsch style connections to be repaired versus having to replace a complete harness
- Can be used on a variety of equipment

**Item No. 4460467****Pin Extraction Tool**

The Pin Extraction Tool is used to remove pin and socket contacts from Deutsch (Cannon) style connections

Model Usage: JLG AWP's and Deutsch Connections (Cannon Plugs)

**Features/Benefits**

- Designed for 16-18 gauge terminals
- Allows for Deutsch style connections to be repaired versus having to replace a complete harness
- Can be used on a variety of equipment

**Item No. 4460519****Pin Extraction Tool**

The Pin Extraction Tool is used to remove pin and socket contacts from Deutsch (Cannon) style connections.

Model Usage: JLG AWP's and Deutsch Connections (Cannon Plugs)

**Features/Benefits**

- Designed for 20-24 gauge terminals
- Allows for Deutsch style connections to be repaired versus having to replace a complete harness
- Can be used on a variety of equipment



**Item No. 7002823****Pin Extraction Tool**

This is a universal extraction tool that accommodates six (6) pin sizes.

Model Usage: All Equipment

**Features/Benefits**

- One tool allows for repair work to be done on multiple sizes and styles of pins/contacts
- This tool is a great addition to any service truck with its many applications

**Item No. 7002841****Pin Extraction Tool P&G Power**

This extraction tool is used to eject the power terminals from the drive motors used on JLG Vertical Mast Products.

Model Usage: JLG DVL, DVSP, MSP

**Features/Benefits**

- Drive Motor replacement can be costly; using this factory approved and recommended tool will help reduce the risk of damaging connections

**Item No. 7002854****Pin Extraction Tool**

The Pin Extraction Tool is used to complete connection repairs on the electrical connections for Precision Governor Controller JLG PN 1600211.

Model Usage: JLG AWP's

**Features/Benefits**

- Some machines may require that the four pin connection on the harness be replaced when replacing the precision governor controller, this extraction tool is needed to complete that repair
- This tool is also part of JLG Kit 2910885





**Item No. 7002830****Pin Extraction Tool**

This Pin Extraction Tool is used to eject the electrical pins from Mini-Fit Connectors that are commonly used on JLG Vertical Mast Machines.

Model Usage: JLG Models VP, VPSP, DVL, DVSP, MVL, MSP

**Features/Benefits**

- Factory recommended service tool
- Allows for connections to be repaired and avoid costly harness replacement

**Item No. 7027910****JR Power Time Extraction Tool**

This extraction tool is used to remove the connectors on JR Power Housings utilized on the JLG Compact Telehandlers.

Model Usage: JLG G5-19A and G6-23A

**Features/Benefits**

- Features a tool handle, tool cover with locking latches and an extraction tool tip

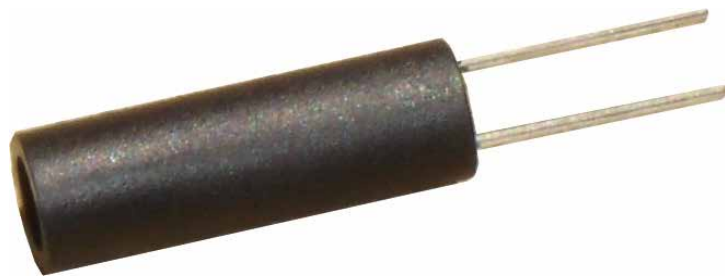
**Item No. 7002842****Pin Extraction Tool P&G Brake**

The Pin Extraction Tool is used to remove the electrical terminals for the drive units on some JLG Vertical Mast products.

Model Usage: JLG DVL, DVSP, MSP

**Features/Benefits**

- Drive Motor replacement can be costly; using this factory approved and recommended tool will help reduce the risk of damaging connections



**Item No. 7027995****Pin Extraction Tool**

This extraction tools is used to remove positive lock connector contacts on your equipment .

Model Usage: All Equipment

**Features/Benefits**

- Features a screw driver style handle for precise grip
- Factory recommended and approved tool

**Item No. 7002817****Pin Extraction Tool**

This Pin Extraction Tool is used to remove the contacts from universal Mate-N-Lock connectors.

Model Usage: Mate-N-Lock Connectors

**Features/Benefits**

- Factory recommended service tool
- Allows for connections to be repaired and avoid costly harness replacement
- Designed specifically for mate-n-lock connections

**Item No. 7024361****Calibration Tool**

The Calibration Tool is used to calibrate the joystick controller on specific JLG machines.

Model Usage: JLG DVL, MVL, MSP, DVSP

**Features/Benefits**

- Plugs into a socket under the joystick controller
- Machine specific tool for the above listed models



**Item No. 7002848****Pin Extraction Tool**

This pin extraction tool is used to remove pin and socket contacts from Tyco and Multimate connections.

Model Usage: All Equipment

**Features/Benefits**

- Works with size 16 pin and socket contacts
- Will work on 2 different style connectors

**Item No. 7002819****Pin Extraction Tool**

The Pin Extraction Tool is used to remove rectangular connector contacts.

Model Usage: All Equipment

**Features/Benefits**

- Used with .093" pin and socket contacts
- Design of the tool allows for socket contacts to be pushed out the back of the connector housing

**Item No. 7002828****Wire Stripper**

The Wire Stripper is an all purpose wiring tool for one step strip and slug removal.

Model Usage: General

**Features/Benefits**

- The Wire Stripper features knife type blades and strips wire up to 7/8"
- The Wire Stripper will reduce the risk of frayed or nicked wires



**Item No. 7002816****Crimping Tool**

This Crimping Tool is used to terminate wires ranging from 14-20 AWG.

Model Usage: All Equipment

**Features/Benefits**

- Ergonomic Design
- Features "Certi-Crimp" ratchet control
- Help reduce partial crimps

**Item No. 80963185****Hand Crimping Tool**

This Crimping Tool is used for crimping weather pack pin and sleeve terminals.

Model Usage: All Equipment

**Features/Benefits**

- Ratcheting style tool
- Allows for a complete crimp in a single cycle
- 14-20 AWG

**Item No. 7002818****Crimping Tool**

This tool is used to provide a precise crimp on Deutsch style pins used in HD/HDP style "Cannon Plugs."

Model Usage: JLG AWP's and HD/HDP Connections

**Features/Benefits**

- Provides smooth ratcheting action
- More precise crimp of Deutsch pin
- Factory recommended service tool





**Item No. 77363326****Deutsch Crimping Tool**

This Crimping Tool is to crimp Deutsch style pins and sockets ranging in size from 20-12 gauge.

Model Usage: All Equipment

**Features/Benefits**

- Ergonomic Design
- Help reduce partial crimps

**Item No. 7025118****Fluke Multimeter**

The Fluke Multimeter is used for electrical troubleshooting to measure voltage, resistance, continuity, diode testing, and more.

Model Usage: All Equipment

**Features/Benefits**

- Large number display for easy reading
- Backlight for dim light areas
- Good for both AC and DC voltages and currents
- Shock and water resistant housing

**Item No. 7002839****Pocket Sized Multimeter**

The Pocket Sized Multimeter is used for electrical troubleshooting to measure voltage, continuity, resistance, and diode testing.

Model Usage: All Equipment

**Features/Benefits**

- Compact size makes it ideal for job site
- Capable of performing a wide range of measurements
- Economically priced metering tool



**Item No. 7025945****Test Probe Pin**

The Test Probe Pin slides onto a test probe to ensure a good connection between a circuit under test and the measuring instrument.

Model Usage: All Equipment

**Features/Benefits**

- Insulated to protect from shorting other wires
- Tested to 60V DC

**Item No. 70010229****Back Probe Pin Set**

The Pin Set is used to check connections on MAP sensors as well as TPS sensors.

Model Usage: All Equipment

**Features/Benefits**

- Flexible 1 1/4" length
- Easy connection past weather pack seal to the connector conductors

**Item No. 7002800****Pin Extraction Tool**

This tool is used to remove the contacts from AMP style connectors. This tool is for use on 12 Gauge terminals.

Model Usage: AMP Connectors

**Features/Benefits**

- Factory Recommended approved tool
- Designed specifically for AMP connections



**Item No. 7025943****Battery / Alternator Tester**

The Tester can be used to perform a state of charge test on both conventional and maintenance free batteries. In addition, the Tester can be used to check for faulty regulators and defective output diodes.

Model Usage: All Equipment

**Features/Benefits**

- Used for both 6V and 12V systems
- Heavy duty insulated clamps
- 300 Amp Jaws

**Item No. 7025942****Rechargeable Soldering Iron**

The Rechargeable Soldering Iron is used to both install electrical components as well as repair components.

Model Usage: All Equipment

**Features/Benefits**

- Built in work light
- Tip heat of 700 degrees can be achieved in 6 seconds
- Solder up to 100 joints per charge

**Item No. 7002805****Applicator Tool**

The Applicator Tool is used when completing repairs on printed circuit board terminals and disconnects.

Model Usage: All Equipment

**Features/Benefits**

- Allows for easy termination of pre-cut wires
- Helps position the wire to the correct depth in the terminal



**Item No. 2915221****GM Diagnostic Kit**

The GM Diagnostic Kit is used to troubleshoot fault codes on a GM Engine.

Model Usage: JLG AWP

**Features/Benefits**

- This is a complete kit with GM Interface Cable, GM Diagnostic Cable, and GM Diagnostic Software

**Item No. 70010393****Cummins Analyzer Kit**

The Cummins Analyzer Kit is used to read fault codes, engine configurations, and to change operating parameters of a Cummins Engine.

Model Usage: JLG Telehandler

**Features/Benefits**

- Kit includes handheld device, USB Cable, 9 pin data link cable, 6 pin data link cable, software, and a storage case.







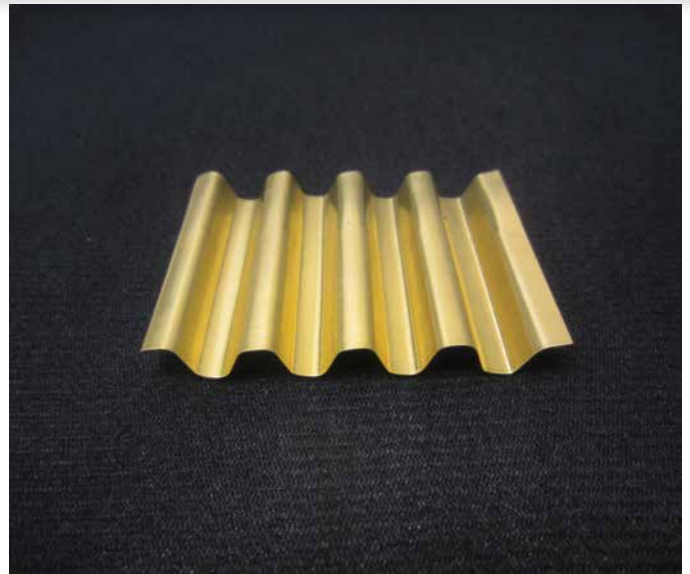
**Item No. 4071009****Swing Drive Shim**

The Swing Drive Shim is used to help set the gear backlash when completing repairs on the swing drive assembly.

Model Usage: JLG E600

**Features/Benefits**

- Conforms to 5/7 pitch fellow stub gear tooth
- Designed to fit between the pinion and bearing high spot
- Once backlash is set shim is removed and discarded

**Item No. 4120040****Hex Socket 3/4"**

This socket is a machine specific socket used to torque the wire rope adjustment nuts on the machines listed. This socket is used on the fly extend adjuster nuts.

Model Usage: JLG 1200/1350SJP

**Features/Benefits**

- Socket has a common 3/8" square drive
- Socket is 6" length to provide the necessary reach to adjust the boom cables

**Item No. 4120043****2" Hex Socket**

This socket is a machine specific socket used to torque the wire rope adjustment nuts on the machines listed. This socket is used on the mid extend/retract and the fly boom retract adjuster nuts.

Model Usage: JLG 1200/1350SJP

**Features/Benefits**

- Socket has a common 1/2" square drive
- Socket is 8" length to provide the necessary reach to adjust the boom cables



**Item No. 7016652****Small Huck-Bolt Installation Tool**

The Small Huck-Bolt Installation Tool is used to install small huck magna-lock blind fasteners to the platform gate for any make model machine. This tool is operated by hand-power, making it ideal for use in the field where power supplies are limited.

Model Usage: JLG AWP's

**Features/Benefits**

- Requires minimum operator effort to develop maximum pull

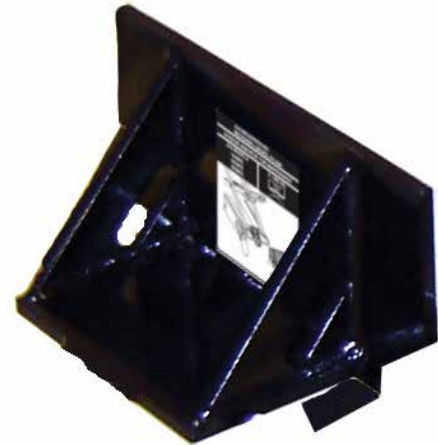
**Item No. 1001128892****Electric Scissor Lift Maintenance Safety Prop**

The Safety Prop is used to support partially raised scissor arms when performing maintenance.

Model Usage: JLG 1930ES, 2030ES, 2630ES, 2646ES, 3246ES

**Features/Benefits**

- No tools required for installation
- Supports partially raised scissor arms
- Great way to reach economy order

**Item No. 7002822****Potentiometer Screwdriver**

The Potentiometer Screwdriver is used to make adjustments to the potentiometer / speed controller on your machine.

Model Usage: JLG AWP's

**Features/Benefits**

- Convenient tool that will fit in your pocket
- Also included in kit PN 7016653



**Item No. 4340710****AWP Service Boom Stand**

The Service Boom Stand is a JLG endorsed maintenance device. This is a heavy duty structure that will support the boom of your machine during maintenance and repair.

Model Usage: JLG Boom Lifts (Excluding All Ultra Booms and 150HAX)

**Features/Benefits**

- Supports loads up to 3,600 lb. (1,633 kg)
- JLG endorsed
- High gauge steel construction
- Extends up to 11 feet in total height

**Item No. 7024526****Hand Held Torch**

The Hand Held Torch is used as a plasma cutter to cut metal.

Model Usage: JLG Boom Lifts

**Features/Benefits**

- The Hand Held Torch can be mounted on JLG Boom Lift's with side entry platforms
- Comes with a 20 foot cable
- Always refer to appropriate machine manuals prior to installing optional components

**Item No. 7016655****Wire Rope Sheave Gauge**

The Wire Rope Sheave Gauge is used to inspect the dimensions of wire rope sheaves inside the boom.

Model Usage: JLG Boom Lifts

**Features/Benefits**

- Technicians can use this gauge to ensure that sheaves have the proper wear and dimensions
- This part is included in JLG Special Tool Kit PN 7016653





**Item No. 7025800****Drum Brake Adjustment Tool**

The Drum Brake Tool is used to adjust the clearance between the brake drum and brake shoe on your equipment.

Model Usage: General

**Features/Benefits**

- Another multi use tool offered by JLG to make work easier around the shop and out on the job site

**Item No. 7025801****Brake Bleeder Wrench**

The Brake Bleeder wrench is used to bleed a brake system. It is essential to use the correct tool for this job to avoid rounding off the bolt.

Model Usage: General

**Features/Benefits**

- The Brake Bleeder Wrench features a 3/8" 6 point head and also a 7/16" 12 point head.

**Item No. 7025304****Fork Caliper**

The Fork Caliper is used to measure wear on your telehandler forks.

Model Usage: Telehandlers

**Features/Benefits**

- The Fork Caliper is a handy tool to let you know when forks are worn and unreliable. The Caliper will let you know when forks need to be replaced.



**Item No. 7016653****Special Tool Kit**

The Special Tool Kit includes the following tools: pin extraction tools, cylinder seal tools, and screwdrivers.

Model Usage: JLG AWP's and Telehandlers

**Features/Benefits**

- This kit combines many of the most common JLG tools into one tool case
- JLG recommended and approved
- Great addition to any service truck

**Item No. 7014676****Tool Kit**

The Tool Kit is a great addition to any service truck. The kit contains many of the common tools needed for any job site.

Model Usage: General

**Features/Benefits**

- Four Piece Crescent Wrench Set
- Allen Wrench Set
- Magnetic Bit Driver Set
- Combination Wrench Set Standard Sizes
- Tool Box

**Item No. 7016654****Magnetic Pocket Screwdriver**

The Magnetic Pocket Screwdriver is a convenient tool that comes in handy around the shop or on any job site.

Model Usage: All Equipment

**Features/Benefits**

- Small enough to carry in your pocket
- Ideal for working in confined areas
- The driver blade has both a flat blade and a Phillips blade
- Included in JLG Special Tool Kit PN 7016653



**Item No. 7025116****48" SmartLevel Tool**

The SmartLevel is used to measure surface angles in a precise manner.

Model Usage: General

**Features/Benefits**

- Accurate measuring of surface angles
- Large number display
- Backlight for dim areas
- Audible tone alerts for level or plumb

**Item No. 7025117****Angle Finder**

The Angle Finder is used to read angles ranging from 0-90 degrees in any quadrant.

Model Usage: General

**Features/Benefits**

- Features a magnetic base
- Includes angle and grate chart

**Item No. 7025799****Tire Pressure and Tread Depth Gauge**

This digital tool is utilized to check air pressure in tires as well as measure tread depth.

Model Usage: General

**Features/Benefits**

- Pressure Gauge reads a range from 2 to 150 psi
- Tool has an automatic off switch to extend the life of the battery
- Compact enough to fit in your pocket



**Item No. 7027854****Multi-Tow Adapter**

The Multi-Tow Adapter is used to convert a 7 pole vehicle plug to a 6 pole plug and a 4 pole flat plug to fit the necessary trailer connector.

Model Usage: General

**Features/Benefits**

- The adapter provides two towing options
- This is a great add on to your JLG parts order







**Item No. 7027247****Hydraulic Hose Removal Tool**

The Hydraulic Hose Removal Tool is used to remove hydraulic pressure lines on the JLG machines listed below.

Model Usage: JLG Vertical Mast SSV10, 10MSP, 15MVL, 15MSP, 20MVL, 20MSP

**Features/Benefits**

- This tool features a 90 degree end for use on straight fittings and a flat end to be used on angled fittings

**Item No. 70000555****Valve Seat Removal Tool**

The Valve Seat Removal Tool is used to remove the main relief valve located in the power packs on ES Scissor Lifts.

Model Usage: JLG ES Scissor Lift

**Features/Benefits**

- Reduces the risk of damaging the valve and manifold block when replacing the main relief valve on ES

**Item No. 7002840****Anti-Rotation Pin Removal Tool**

This tool is used to remove the pin when servicing the cam valves used on JLG AWP's. This valve is also known as the lockout valve and is located in the machine's turntable.

Model Usage: JLG Boom Lifts

**Features/Benefits**

- This tool comes with the head, extractor, and necessary hardware.



## Get your equipment back on the job site more efficiently with the cylinder repair tools listed below for JLG 1200/1350SJP 1250AJP and 340AJ.

Part Number	Tool Description	Machine Model	Specific Cylinder
1001106846	Head Install Sleeve	1200/1350SJP & 1250AJP	Main Lift and Tower Lift Cylinder
1001106847	Piston Install Sleeve	1200/1350SJP & 1250AJP	Main Lift and Tower Lift Cylinder
1001106848	Piston Go Gauge Tool	1250AJP	Main Lift and Tower Lift Cylinder
1001107000	Head Install Sleeve	1250AJP	Upper Lift Cylinder
1001107001	Piston Install Sleeve	1250AJP	Upper Lift Cylinder
1001107002	Piston Go Gauge Tool	1250AJP	Upper Lift Cylinder
1001107143	Head Install Sleeve	1250AJP	Tower Telescope Cylinder
1001107145	Piston Install Sleeve	1250AJP	Tower Telescope Cylinder
1001107146	Piston Go Gauge Tool	1250AJP	Tower Telescope Cylinder
1001107147	Piston Go Gauge Tool	1250AJP	Tower Telescope Cylinder
70003077	Dust Wiper Press Tool	340AJ	Tower Lift and Steer Cylinder
70003078	Bushing Press Tool	340AJ	Tower Lift and Steer Cylinder
70003080	Head Seal Protection Tool	340AJ	Tower Lift and Steer Cylinder
70003081	Piston Seal Protection Tool	340AJ	Tower Lift Cylinder
70003082	MRP Bearing Press Tool	340AJ	Tower Lift and Main Lift Cylinder
70003083	MRP Bearing Removal Tool	340AJ	Tower Lift and Main Lift Cylinder
70003089	Dust Wiper Press Tool	340AJ	Master, Platform, Level and Telescope Cylinder
70003090	Du Bushing Press Tool	340AJ	Master, Platform, Level, and Telescope Cylinder

### Item No. 70010878

## Hydraulic Flow Meter

The Flow Meter is used when troubleshooting your equipment's hydraulic system by monitoring the volume of hydraulic fluid that is flowing through the hydraulic circuit.

Model Usage: JLG Boom Lifts & Telehandlers

### Features/Benefits

- The Flow Meter measures a flow range of 3-30 GPM
- Max operating pressure 3500PSI
- Utilizes a 3/4" NPT port



**Item No. 7002826****Cylinder Seal Installation Tool  
("Pretzel Maker")**

This tool is used to install the cylinder rod seals when repairing a hydraulic cylinder.

Model Usage: General

**Features/Benefits**

- Designed for .75"-1.5" cylinder rods
- Reduces the risk of damaged or cut seals during cylinder repair

**Item No. 7002832****3.75" Stop Ring Wrench Tool**

The Stop Ring Wrench Tool is used to remove and install the stop rings when assembling or disassembling hydraulic cylinders.

Model Usage: General

**Features/Benefits**

- Factory approved and recommended tool
- Hydraulic cylinder repair made easier with the proper tools for the job
- Designed for 3.75" outside diameter sleeve or barrel

**877-JLG-LIFT****Item No. 7002835****6.75" Stop Ring Wrench Tool**

The Stop Ring Wrench Tool is used to remove and install the stop rings when assembling or disassembling hydraulic cylinders.

Model Usage: General

**Features/Benefits**

- Factory approved and recommended tool
- Hydraulic cylinder repair made easier with the proper tools for the job
- Designed for 6.75" outside diameter sleeve or barrel

**877-JLG-LIFT**



**Item No. 7000652**

**Hydraulic Pressure Dial Gauge Kit**

This quality Gauge Kit is used to check and adjust operating pressures for optimum productivity of your equipment.

Model Usage: General

**Features/Benefits**

- Assures optimum productivity
- Easy way to check and adjust the operating pressure on your machine
- Replacement components available



**Replacement Components for Kit PN 7000652**

Replacement Part Number	Description	Additional Information
2220427	Hydraulic Quick Coupling	Female Style Quick Disconnect
2220428	Hydraulic Quick Coupling	Male Style Quick Disconnect
7024546	1/4 NPT	SMA20-1--1/4NPT-V
7024547	20/20 Hose Union Adapter	Used to Connect two SMS Hoses
7024550	98" Hose Assembly	
7024551	192" Hose Assembly	
7024555	1/2 UNF-V Test Fitting	M16x2 by 1/2" Female NPT
7024548	1/4 NPT Gauge	0 to 1,000 PSI
7024549	1/4 NPT Gauge	0 to 10,000 PSI



**Item No. 7000101**

**Digital Hydraulic Pressure Test Kit**

This high pressure digital gauge kit makes checking hydraulic pressures easier. The digital display helps reduce the potential for error in readings. This kit has range of 8,000 psi.

Model Usage: General Usage

**Features/Benefits**

- User-friendly digital display
- Precise +/- .5% full scale accuracy
- Replacement parts available
- Four digit display



**Replacement Components for Kit PN 7000101**

Replacement Part Number	Description
7025790	Short Testing Hose
7025791	Long Testing Hose
7025793	1/4" Female Disconnect
7025806	Diagnostic Q-C Fitting
91033032	1/4" Test Adaptor
91033033	1/8" Test Adaptor
77133089	9/16" Test Adaptor
91053020	7/16" Test Adaptor
7025794	Digital Gauge Only
7025789	Direct Gauge Adaptor
7024557	Extra O-Rings
7024547	Union Fitting
7025788	Protective Boot



**Item No. 70011039****Hydraulic Pump Load Test Kit**

The Hydraulic Pump Load Test Kit is an easier and more convenient way to load test your hydraulic pump. Verifying pressure and output flow will help identify maintenance or replacement requirements without a major investment.

Model Usage: All JLG Equipment

**Features/Benefits**

- Test under simulated load conditions
- No need for permanently mounted gauges
- Indication of successful new component installation
- Several JIC adapters for #4, #6, or #8 circuits
- Several additional cutouts provided for additional adapters

**Item No. 7133413****Skytrak Pressure Test Kit**

This pressure testing kit is designed specifically with Skytrak equipment in mind.

Model Usage: Skytrak Telehandlers

**Features/Benefits**

- This kit includes all necessary testing equipment such as gauges, fittings and hoses
- Kit also comes with hydraulic schematics for pre-JLG Skytrak equipment

**Item No. 7301438****STC Hose Tool**

The STC Hose Tool is used to remove STC style hoses from the block located in the transfer carriage for the extend / retract and lift / lower circuits.

Model Usage: Lull 644E/944E

**Features/Benefits**

- The STC Hose Tool is a factory approved and recommended tool to be used to release the snap lock style connections on the hoses listed above



**Item No. 91474611****Specialized Fitting**

The Specialized Fitting is needed to check hydraulic pressure on a Dana transmission.

Model Usage: G642A & G9-43A equipped with Dana Transmission

**Features/Benefits**

- Specific fitting designed for Dana transmission testing
- Available as a replacement part or with JLG PN 7027911

**Item No. 8430045****Quick Connect Fitting**

The Quick Connect Fitting is used to when hydraulic pressures are being tested or adjusted on Skytrak and Lull machines.

Model Usage: Skytrak and Lull Telehandlers

**Features/Benefits**

- 1/4"-18
- This fitting is available for purchase and is also included with Part Number 7027911







**Item No. 2915221****GM Diagnostic Kit**

The GM Diagnostic Kit is used to troubleshoot fault codes on a GM Engine.

Model Usage: JLG AWP

**Features/Benefits**

- This is a complete kit with GM Interface Cable, GM Diagnostic Cable, and GM Diagnostic Software

**Item No. 0080229****Torque Clutch Adapter Tool**

The torque clutch adapter tool is used to check the torque clutch setting on JLG Vertical Mast products.

Model Usage: JLG VP, VPSP, DVL, DVSP

**Features/Benefits**

- Hex style adapter
- 2" Length
- The adapter tool will be used in regular intervals as part of the maintenance on your JLG Vertical

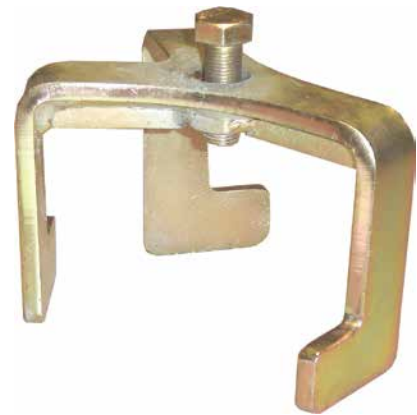
**Item No. 2915027****Rear Wheel Puller**

The Rear Wheel Puller is used to remove the drive wheel on some JLG Vertical Mast Machines.

Model Usage: JLG SSV10 and MSP

**Features/Benefits**

- Can be tightened against the drive shaft to remove the drive wheels on the equipment listed
- A JLG recommended service tool



**Item No. 2915159****ZF Transmission Test Fitting Kit**

This test fitting kit provides all of the specialized fittings required to check pressure on a ZF Transmission.

Model Usage: Lull, Skytrak, and JLG G-Series Telehandlers

**Features/Benefits**

- Kit includes the following fittings:
- PN 77363046 Adapter 7/16-20 JIC Male/M10
- PN 91403258 Adapter 1/4 SAE 37 Degree/M10/ 90 Degree
- PN 8430036 Nipple Diag .435

**Item No. 7025112****ZF Transfer Box Seal Installer**

The Transfer Box Seal Installer is used to install shaft seal PN 1320755 into the transfer housing.

Model Usage: Skytrak Telehandlers 6036, 6042, 8042, 10042, 10054 and JLG G10/G12-55A

**Features/Benefits**

- Reduce the risk of damaging seal during installation
- JLG recommended service tool

**Item No. 7025113****ZF Lock Plate Installer**

The Lock Plate Installer is used to press on the lock plate when working ZF Transmission.

Model Usage: Skytrak Telehandlers 6036, 6042, 8042, 10042, 10054 and JLG G10/G12-55A

**Features/Benefits**

- This tool will work on both lock plate PN 7029033 and lock plate PN 1319469 depending on your specific application
- JLG recommended service tool



**Item No. 7025110****ZF Special Brake Seal Kit Adaptor**

This Adaptor is used to install the input seal that is included in brake seal kit JLG PN 7029104.

Model Usage: Skytrak 6036, 6042, 8042 and Lull 644E, 944E equipped with ZF MS-T 3045 axle

**Features/Benefits**

- Attempting to install seals without the correct tools can lead to damaged seals and more machine down time
- Use this JLG approved and recommended tool to reduce the risk of damaging the seals during repair

**Item No. 7025111****ZF Brake Seal Kit Driver**

The ZF Brake Seal Kit Driver is used to install the shaft seal into the axle joint housing.

Model Usage: Telehandlers equipped with ZF

**Features/Benefits**

- Need to properly install the shaft seal that is included in Brake Seal Kit JLG PN 7029104.
- Use this JLG approved and recommended tool to reduce the risk of damaging the seal during repair

**Item No. 7025854****ZF Two Arm Puller**

The ZF Two Arm Puller has multiple uses in completing axle repairs.

Model Usage: Telehandlers equipped any of the following ZF Axles MS-T 3045, MS-T 3060, MS-T 3045II, MS-T 3060II (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Jaw width 350mm and throat depth 250mm
- Universal tool that has several functions including removing the hub from joint housing, removing the bearing inner ring from joint housing, and to press out bevel pinion from the axle housing





**Item No. 7029738****ZF Seal Driver**

The ZF Seal Driver is used to install shaft seal PN 1321164 or shaft seal PN 7028977 into the axle joint housing.

Model Usage: Machines equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Using the correct tool for the job can reduce the risk of damaging seals when completing axle repairs and get your equipment back on the job site faster

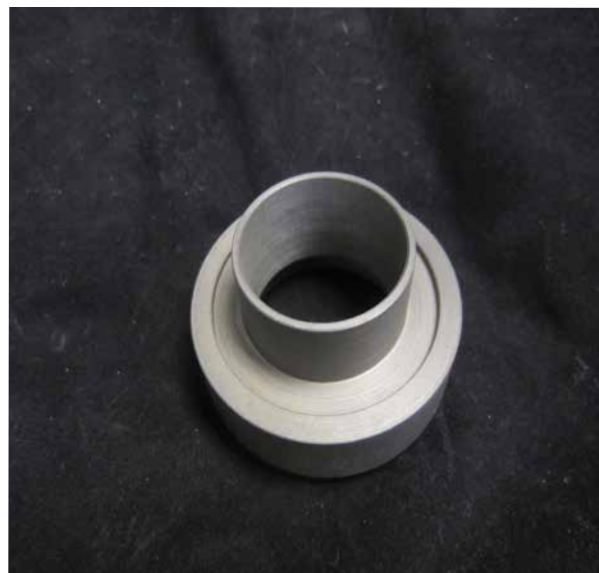
**Item No. 7029739****ZF Seal Driver**

The ZF Seal Driver is used to install shaft seal PN 8036754 into the axle joint housing.

Model Usage: Machines equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Using the correct tool for the job can reduce the risk of damaging seals when completing axle repairs and get your equipment back on the job site faster

**Item No. 7029740****ZF Driver Handle**

The ZF Driver Handle is used in conjunction with ZF Seal Drivers PN 7029738 and PN 7029739.

Model Usage: Machines equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Using the correct tool for the job can reduce the risk of damaging seals when completing axle repairs and get your equipment back on the job site faster



**Item No. 70010239****ZF Axle Two Leg Puller**

This tool is considered a universal puller and is commonly used in axle disassembly to pull the planetary gear and also for pressing the tie rod end from the axle joint housing.

Model Usage: Telehandlers equipped with ZF MS-T 3045II and MS-T3060II axles (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- A universal tool that can be used for several functions during axle disassembly
- Jaw width 170mm
- Throat depth 125mm

**Item No. 70010240****ZF High -Gripper**

The ZF High-Gripper is used to remove tapered roller bearing inner ring from the axle joint housing.

Model Usage: Telehandlers equipped with ZF MS-T3060 (Including Skytrak 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- This tool can be used in conjunction with ZF Tools PN 70010241

**877-JLG-LIFT****Item No. 70010241****ZF Threaded Ring**

The ZF Threaded Ring is used in conjunction with the High-Gripper to remove the tapered roller bearing inner ring from the axle joint housing.

Model Usage: Telehandlers equipped with ZF Axle MS-T3060 (Including Skytrak 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- This tool is used in conjunction with ZF Tools PN 70010240

**877-JLG-LIFT**

**Item No. 70010281****ZF Slotted Nut Wrench Tool**

The ZF Slotted Nut Wrench Tool is used to install and remove the slotted nut utilized on steer cylinders on the ZF Axles listed.

Model Usage: Telehandlers equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- The Nut Wrench Tool will reduce the risk of damaging or rounding off the slotted nut on the steer cylinder

**Item No. 70010282****ZF Assembly Ring**

The ZF Assembly Ring is used to pre load the cup springs PN 1321208 when working on the axle brakes on the ZF Axles listed.

Model Usage: Telehandlers equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- The Assembly ring helps to fasten and unfasten the snap ring when pre loading the cup springs

**Item No. 70010283****ZF Installer Tool**

The ZF Installer Tool is used to install the slip ring into the annular grooves of the piston rod when assembling the steer cylinder.

Model Usage: Telehandlers equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Using the correct tool for the job can reduce machine time and get your equipment back up and running more efficiently



**Item No. 70010284****ZF Installer Tool**

The ZF Assembly Ring Tool is used to mount the slip rings onto the piston rod when assembling the steer cylinder.

Model Usage: Telehandlers equipped with ZF MS-T 3045 and MS-T 3060 axles (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Using the correct tool for the job can reduce machine time and get your equipment back up and running more efficiently

**Item No. 70010285****ZF Extracting Tool**

This ZF Extracting Tool is used to remove the double universal joint from the axle joint housing.

Model Usage: Telehandlers equipped with ZF MS-T3045 and MS-T3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Provides the mechanic with necessary tool and leverage to press off the double joint from the joint housing

**Item No. 70022867****ZF Torque Spanner Wrench**

The ZF Torque Spanner Wrench is used to check the rolling moment of the swivel bearing at the wheel ends.

Model Usage: Telehandlers equipped with ZF Axle MS-T3045 and MS-T3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- When installing new roller bearing it is essential that the upper value of rolling moment is achieved. The Torque Spanner Wrench Tool helps to ensure this is done accurately.





**Item No. 70022872****ZF Internal Extractor (45-58mm)**

The ZF Internal Extractor can be used to remove bearings in both ZF axles and ZF transmissions. This extractor can also be used to remove axle shaft seals as well as roller bearing outer rings.

Model Usage: Telehandlers equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Multi use tool for repair work on ZF axles and transmissions
- 45mm-58mm

**877-JLG-LIFT****Item No. 70022873****ZF Internal Extractor (70-100mm)**

The ZF Internal Extractor can be used to remove bearings, seals, and bushings in ZF Axles. It is also used to remove axle shaft seals as well as roller bearing outer rings.

Model Usage: Telehandlers equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Multi use tool for repair work on ZF axles and transmissions
- 70mm-100mm

**Item No. 70023173****ZF Back Off Insert**

The ZF Back Off Insert is to assist in the disassembly of the output portion of the axle. This tool helps to separate the bearing inner ring from the bearing pin.

Model Usage: Telehandlers equipped with ZF Axle Model MS-T 3045 and MS-T 3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- Using the correct tool for the job can reduce machine down-time and get your equipment back up and running more efficiently



**Item No. 700110101****ZF Driver**

The ZF Driver is used to install hub seals JLG PN 7028977 and JLG PN 1321164.

Model Usage: Telehandlers equipped with ZF MS-T 3045 and MS-T 3060 axles (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- JLG recommends use of this tool to reduce the risk of damaging seals during installation. Damaged seals can be costly and create more down time for your equipment.

**Item No. 70010245****ZF Counter Support**

This ZF Extracting Tool is used to remove the double universal joint from the axle joint housing.

Model Usage: Telehandlers equipped with ZF MS-T3045 and MS-T3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- JLG recommended service tool when working on ZF axles; having the correct tool for the job can help get your equipment back on the job site sooner

**Item No. 70010244****ZF Puller / Extractor**

This ZF Puller / Extractor is used to remove the bushing and shaft seal from the axle casing. This tool is also used to install the double joint into the joint housing.

Model Usage: Telehandlers equipped with ZF MS-T3045 and MS-T3060 (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- The ZF Puller / Extractor is a multi use tool
- When used as a puller this tool will assist in making sure the double universal joint is pulled into the axle joint housing until contact



**Item No. 80304486****ZF Two Leg Puller**

The ZF Two Leg Puller is used to press off the hub from the axle joint housing.

Model Usage: Telehandlers equipped with ZF MS-T 3045 , MS-T 3060, MS-T 3045II, and MS-T 3060II (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- The ZF Two Leg Puller will provide the technician with factory approved tool to provide the leverage to assist in removing the hub from the axle joint housing.

**Item No. 7025190****ZF Axle Alignment Tool**

The ZF Axle Alignment Tool is used to assist in proper alignment of the axle shaft.

Model Usage: Telehandlers equipped with ZF MS-T 3045 , MS-T 3060, MS-T 3045II, and MS-T 3060II (Including Skytrak 6036, 6042, 8042, 10042, 10054 and Lull 644E, 944E, 1044C-54)

**Features/Benefits**

- JLG recommended service tool when working on ZF axles; having the correct tool for the job can help get your equipment back on the job site sooner

**Item No. 7029574****Carraro Bearing Cup Tool Kit**

The Carraro Bearing Cup Tool Kit is used to help seat the bearings when assembling the pinion and central body assembly.

Model Usage: Gradall Telehandlers equipped with Carraro axles

**Features/Benefits**

- It is important to make sure during this assembly process that the bearings are properly seated. This tool kit helps to ensure this is accomplished.

**877-JLG-LIFT**

**Item No. 7029575****Carraro Dummy Pinion Kit**

The Carraro Dummy Pinion Kit is used to eliminate the backlash when seating the bearings in the central body assembly.

Model Usage: Gradall Telehandlers equipped with Carraro axle

**877-JLG-LIFT****Features/Benefits**

- The Dummy Pinion Kit will reduce the risk of damaging the bearings and the central body while assembling this portion of the axle

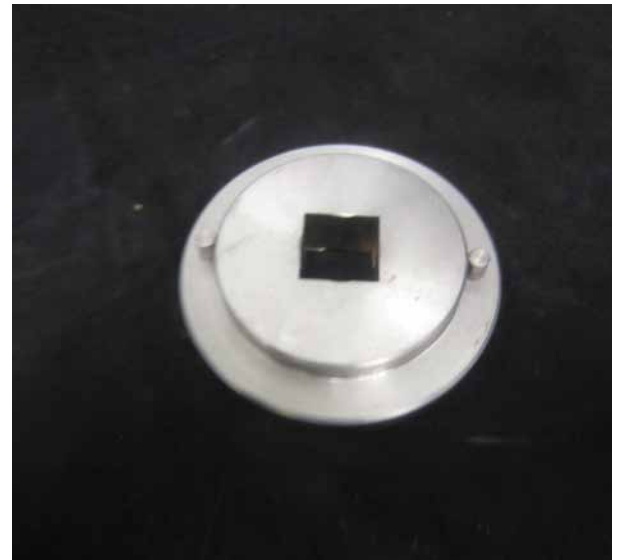
**Item No. 8035818****Carraro Wrench**

This Wrench is utilized to assist in the disassembly of the differential on a Carraro Axle.

Model Usage: Telehandlers equipped with Carraro Axles

**Features/Benefits**

- Helpful tool for unscrewing the adjuster ring nuts
- JLG recommended service tool

**Item No. 8035819****Carraro Brake Presser Tool**

The Carraro Brake Presser Tool is used in the disassembly of the brake cylinder used on a Carraro Axle.

Model Usage: Telehandlers equipped with Carraro Axle

**Features/Benefits**

- This tool provides the technician with a tool that will make disassembling the brake cylinder easier by releasing the snap ring
- This multi use tool is also used during cylinder assembly to insert the negative brake piston inside the cylinder





**Item No. 91474603****Carraro Bushing Driver Tool**

The Carraro Bushing Driver Tool is used to install the bushings in the spindle housing.

Model Usage: Skytrak Model 3606 equipped with Carraro Axle

**Features/Benefits**

- The Bushing Driver is a factory approved tool from Carraro that will reduce the risk of damaging bushings during installation and make sure they are installed to the correct depth

**Item No. 91474604****Carraro Seal Driver Tool**

The Carraro Seal Driver is used to seals into the spindle housing on the Carraro axle listed.

Model Usage: Skytrak Model 3606 equipped with Carraro Axle

**Features/Benefits**

- This tool is needed to make sure that the spindle seals are properly seated during hub assembly
- Seals can be damaged during this process if the correct tools are not used

**Item No. 91474605****Carraro Pinion Nut Tool**

The Carraro Pinion Nut Tool is used to unscrew the pinion nut when disassembling the Carraro Axle pinion group.

Model Usage: Telehandlers equipped with Carraro Axles

**Features/Benefits**

- The threads on the pinion nut can be damaged if the correct tools are not used for the job. This JLG recommended service tool will reduce the risk of damaging the threads.



**Item No. 91474613****Carraro Seal Driver**

The Carraro Seal Driver is used to install the pinion seal into axle's central housing.

Model Usage: Telehandlers equipped with Carraro axle

**Features/Benefits**

- The Carraro Seal Driver helps to ensure that the pinion seal is properly seated without damaging the seal

**Item No. 7027857 (socket) and 7027856 (adaptor)****Carraro Spanner Socket and Adaptor Tool**

This tool combination is used to remove the pinion nut.

Model Usage: Skytrak Telehandlers equipped with Carraro Axles

**Features/Benefits**

- These tools are used in conjunction with one another to remove the pinion nut

**Item No. 7118842****Dana Axle Brake Piston Tool**

The Dana Axle Brake Piston Tool is used to assist in the installation of the axle brake piston.

Model Usage: Telehandlers equipped with Dana Axle

**Features/Benefits**

- This tool helps to prevent sheared or pinched O-rings by rotating the piston as it is pressed into the O-rings.



**Item No. 70010156****Bearing Cone Tool**

The Bearing Cone Tool is used to assist in the reassembly of the power wheel on certain Gradall Machines.

Model Usage: Gradall Telehandler Models 534D9, 534D10, and 544D

**Features/Benefits**

- Used to press bearing cone over the spindle
- More efficient way to make sure bearing is properly placed versus using a hammer and a driver and less likely to damage the bearing or spindle

**Item No. 70010157****Spindle/Shaft Drive Tool**

The Spindle/Shaft Drive Tool is used to assist in the disassembly of the power wheel assembly used on certain Gradall Machines

Model Usage: Gradall Telehandler Models 534D9, 534D10, and 544D

**Features/Benefits**

- The Spindle/Shaft Drive Tool is designed to bolt to the drive hub
- Features a bolt in the center that is turned and provides the mechanic with the force needed to separate the spindle from the drive hub
- Will reduce the risk of damaging splines

**Item No. 91144325****Special Locknut Wrench**

The Special Locknut Wrench is used to assist in the disassembly of the power wheel assembly used on certain Gradall Machines

Model Usage: Gradall Telehandler Models 534D9, 534D10, and 544D

**Features/Benefits**

- The Locknut Wrench is specially designed to fit on the locknut
- Use of this tool will reduce the risk of rounding off the nut or damaging the threads during removal



## JLG AWP Boom Lifts Specialty Tools

		<b>Pg</b>
<b>30E</b>		
2900832	Calibrator	5
<b>340AJ</b>		
70003077	Dust Wiper Press Tool	28
70003078	Bushing Press Tool	28
70003080	Head Seal Protection Tool	28
70003081	Piston Seal Protection Tool	28
70003082	MRP Bearing Press Tool	28
70003083	MRP Bearing Removal Tool	28
70003089	Dust Wiper Press Tool	28
70003090	Bushing Press Tool	28
<b>T350/500</b>		
4923341	Outrigger Jack Harness	7
<b>35E</b>		
2900832	Calibrator	5
<b>40E</b>		
2900832	Calibrator	5
<b>400S/460SJ</b>		
4922012	Rexroth Harness	7
<b>45E</b>		
2900832	Calibrator	5
<b>E600</b>		
4071009	Swing Drive Shim 1	9
<b>600S/660SJ</b>		
4922012	Rexroth Harness	7
<b>600SC/660SJC</b>		
1600303	Optimizer	5
<b>601S</b>		
4922012	Rexroth Harness	7
<b>800A/800AJ</b>		
4922012	Rexroth Harness	7



**1200/1350SJP**

4120040	Socket ¾"	19
4120043	Socket 2"	19
1001106846	Head Install Sleeve	28
1001106847	Piston Install Sleeve	28

**1250AJP**

1001106846	Head Install Sleeve	28
1001106847	Piston Install Sleeve	28
1001106848	Piston Go Gauge Tool	28
1001107000	Head Install Sleeve	28
1001107001	Piston Install Sleeve	28
1001107002	Piston Go Gauge Tool	28
1001107143	Head Install Sleeve	28
1001107145	Piston Install Sleeve	28
1001107146	Piston Go Gauge Tool	28
1001107147	Piston Go Gauge Tool	28

**JLG AWP Scissor Lift Specialty Tools****3369/3969E**

2900832	Calibrator	5
---------	------------	---

**1930/2030/2630/2646/3246ES**

1001128892	ES Maintenance Safety Prop	20
70000555	Valve Seat Removal Tool	27

**JLG AWP Vertical Mast Specialty Tools****DVL/DVSP/MSP**

7002841	Pin Extraction Tool	9
7002842	Pin Extraction Tool	10

**VP/VPSP/DVL/DVSP/MVL/MSP**

7002830	Pin Extraction Tool	10
---------	---------------------	----

**DVL/MVL/MSP/DVSP**

7024361	Calibration Tool	11
---------	------------------	----

**SSV/MSP/MVL**

7027247	Hyd. Hose Removal Tool	27
---------	------------------------	----

**VP/VPSP/DVL/DVSP**

0080229	Torque Clutch Adapter	35
---------	-----------------------	----

**SSV10/MSP**

2915027	Rear Wheel Puller	35
---------	-------------------	----

## JLG/Gradall Telehandler Tools

### G5-19A/G6-23A

7027910	JR Power Time Extraction	10
---------	--------------------------	----

### G Series

2915159	ZF Trans Test Fitting Kit	36
7025112	ZF Transfer Box Seal Install	36
7025113	ZF Lock Plate Installer	36

### 534D9/534D10/544D

70010156	Bearing Cone Tool	48
70010157	Spindle/Shaft Drive Tool	48
91144325	Special Locknut Wrench	48

## Lull Telehandler Tools

### 644E/944E/1044C-54

7025110	ZF Brake Seal Kit Adapter	37
7025111	ZF Brake Seal Kit Driver	37
7025854	ZF Two Arm Puller	37
7029738	ZF Seal Driver	38
7029739	ZF Seal Driver	38
7029740	ZF Driver Handle	38
70010239	ZF Axle Two Leg Puller	39
70010241	ZF Slotted Nut Wrench	40
70010282	ZF Assembly Ring	40
70010283	ZF Installer	40
70010284	ZF Installer	41
70010285	ZF Extractor	41
70022867	ZF Torque Spanner	41
70022873	ZF Internal Extractor	42
70023173	ZF Back Off Insert	42
700110101	ZF Driver	43
70010245	ZF Counter Support	43
70010244	ZF Puller/ Extractor	43
80304486	ZF Two Leg Puller	44
7025190	ZF Alignment Tool	44

## Skytrak Telehandlers

### 3606

91474603	Carraro Bushing Driver	46
91474604	Carraro Seal Driver Tool	46

### 6036/6042/8042/10054

7025110	ZF Brake Seal Kit Adapter	37
7025111	ZF Brake Seal Kit Driver	37
7025854	ZF Two Arm Puller	37
7029738	ZF Seal Driver	38
7029739	ZF Seal Driver	38
7029740	ZF Driver Handle	38
70010239	ZF Axle Two Leg Puller	39
70010241	ZF Slotted Nut Wrench	40
70010282	ZF Assembly Ring	40
70010283	ZF Installer	40
70010284	ZF Installer	41
70010285	ZF Extractor	41
70022867	ZF Torque Spanner	41
70022873	ZF Internal Extractor	42
70023173	ZF Back Off Insert	42
700110101	ZF Driver	43
70010245	ZF Counter Support	43
70010244	ZF Puller/ Extractor	43
80304486	ZF Two Leg Puller	44
7025190	ZF Alignment Tool	44

## Other Telehandler Tools

7029574	Carraro Bearing Cup Tool	44
7029575	Carraro Dummy Pinion	45
8035819	Carraro Brake Presser Tool	45
91474605	Carraro Pinion Nut Tool	46
91474613	Carraro Seal Driver	47
7027857	Carraro Spanner Socket	47
7027856	Carraro Adaptor Tool	47
7118842	Dana Axle Brake Piston Tool	47

## JLG Multi-Use Tools

*\*\*Indicates Top Selling Tool*

2901443	<i>JLG Hand Held Analyzer</i>	5**
7025944	Oscilloscope	6
1060629	<i>Communication Cable</i>	6**
1001137005	<i>Communication Cable</i>	6**
4921299	9 Pin Test Harness	6
4921300	12 Pin Test Harness	7
4460510	<i>Pin Extraction Tool (12-14)</i>	8**
4460467	<i>Pin Extraction Tool (16-18)</i>	8**
4460519	<i>Pin Extraction Tool (20-24)</i>	8**
7002823	Pin Extraction Tool	9
7002854	Pin Extraction Tool	9
7027995	Pin Extraction Tool	11
7002817	Pin Extraction Tool	11
7002848	Pin Extraction Tool	12
7002819	Pin Extraction Tool	12
7002828	Wire Stripper	12
7002816	Crimper	13
80963185	Crimper	13
7002818	<i>Crimper (Cannon Style)</i>	13**
77363326	Crimper (Deutsch)	14
7025118	Fluke Multimeter	14
7002839	Pocket Sized Meter	14
7027945	Test Probe Pin	15
70010229	Back Probe Pin Set	15
7002800	Pin Extraction Tool	15
7025943	Battery/Alternator Tester	16
7025942	Rechargeable Soldering Iron	16
7002805	Applicator Tool	16
2915221	GM Diagnostic Kit	17
70010393	Cummins Analyzer Kit	17
7016652	Small Huck Bolt Install Tool	20
7002822	Potentiometer Screwdriver	20
4340710	AWP Service Boom Stand	21
7024526	Hand Held Torch	21
7016655	Wire Roper Sheave Gauge	21
7025800	Drum Brake Adjust Tool	22
7025801	Brake Bleeder Wrench	22
7016653	<i>Special Tool Kit</i>	23**
7014676	Tool Kit	23



7016654	Magnetic Pocket Screwdriver	23
7025116	48" Smart Level	24
7025117	Angle Finder	24
7025779	Tire Pressure Gauge	24
7027854	Multi-Tow Adapter	25
7002840	Anti-Rotation Pin Removal	27
70010878	Flow Meter	28
7002826	<i>Cylinder Seal Install Tool</i>	29**
70000652	<i>Hyd. Pressure Dial Kit 3</i>	0**
70000101	<i>Digital Pressure Kit</i>	30**
70011039	<i>Hydraulic Load Test Kit 3</i>	2**





**JLG Industries, Inc.**

1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
**www.jlg.com**

An Oshkosh Corporation Company

Part No. 401002  
R0214  
Printed in USA

