

# X26JP PLUS

COMPACT CRAWLER BOOM

BOOM LIFT



## Performance

Working Height	25.60 m
Platform Height	23.60 m
Working Outreach	13.75 m
Up & Over Height	10.10 m
Swing (Non-continuous)	360°
Jib - Overall Length	1.68 m
Jib - Range of Articulation (+/-)	89° (+0/-89°)
Platform Capacity (Unrestricted)	230 kg
Platform Size	0.69 m x 1.34 m
Basket Rotation	124° (+/- 62°)
Stowed Width (With Platform)	1.34 m
Width of Undercarriage (Retracted/Extended)	0.99 m / 1.49 m
Machine Weight <sup>1</sup>	4,550 kg
Ground Bearing Pressure on Outriggers	4.51 kg/cm <sup>2</sup>
Gradeability	28%
Maximum Operating Slope	16°
Max. Approach / Depart Angles	Front 22° / Rear 17°

<sup>1</sup> Certain options or country standards may increase weight and/or dimensions.

## Standard Specifications

### Power Source

Bi-Energy

- Kubota D902 16.1 kw (21.6cHP) Diesel T4F (Stage 5) Engine
- 100 Ah / 83V Electric engine with Lithium battery package including battery charger

### Tracks

- Non-marking rubber tracks 2.10 m x 0.23 m x 0.38 m

## Standard Features

- 0.69 m x 1.34 m Aluminium 2 person platform
- SkyGuard
- Slide bar rear entry
- Footswitch
- Full proportional control
- Articulating jib
- Remote Control (via cable to platform)
- Full Remote Control of drive and stabilization
- Multi-lingual LCD display on platform console
- Platform console position sensor and lock
- Envelope management load sensing system
- Platform designed for ease of removal/changeover
- Engine protection
- Rubber Outrigger Pads
- Cylinder Rod Protection on Outriggers
- Automatic cut-out when out of level
- Powered track extensions/retraction
- Turntable alignment sensor and gauge
- Emergency descent systems
- Electro-hydraulic controls
- Full pressure hydraulic controls
- Lifting/Tie down points
- Forklift pockets
- AS/NZS 1418.10 Compliance



## Accessories & Options

- AC Outlet To Platform incl. ELCB
- Fire Extinguisher

# X26JP PLUS


COMPACT CRAWLER BOOM

BOOM LIFT



## Dimensions


All dimensions are approximate.

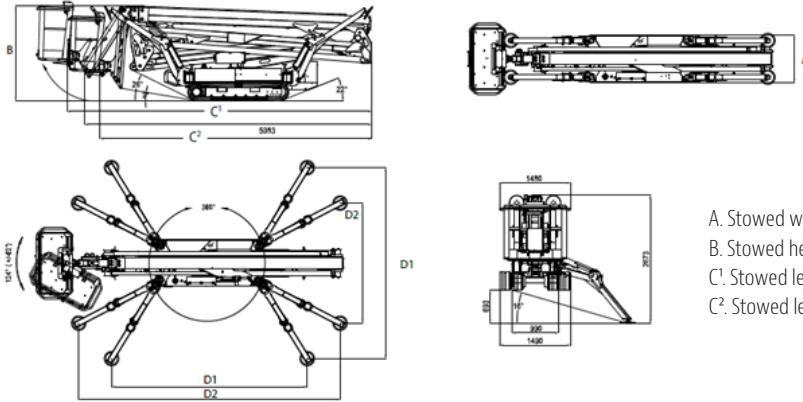

- A. Stowed width (without platform) 0.99 m
- B. Stowed height (on tracks) 1.99 m
- C. Stowed length (on tracks) 6.35 m
- C'. Stowed length (on tracks) without Basket 5.98 m

- D. Outrigger footprint
- D1. Wide 4.01 m x 3.98 m
- D2. Narrow 5.4 m x 2.5 m

## Reach Diagram

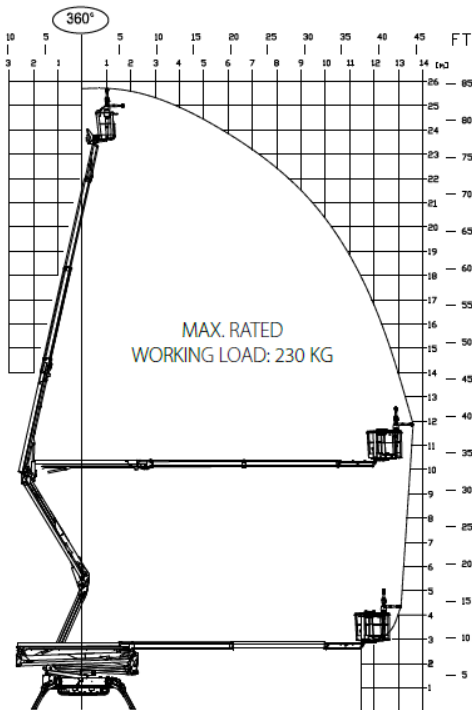

## The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

### JLG Industries (Australia)

358 Park Road  
Regents Park, NSW 2143  
Telephone 02 8718 6300  
Fax 02 8718 6377

[www.jlg.com.au](http://www.jlg.com.au)

An Oshkosh Corporation Company