

# RT SERIES

## ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS



### Performance

• Platform Height—Elevated			
RT2669	26'2"	8 m	
RT3369	32'8"	10 m	
RT4069	40'3"	12.3 m	
RT4769	7'	14.3 m	
• Platform Height — Lowered			
RT2669	4'3"	1.3 m	
RT3369	4'9"	1.5 m	
RT4069	4'10"	1.5 m	
RT4769	5'4"	1.6 m	
• Platform Capacity (Single Extension)			
RT2669	1,500 lb	680 kg	
RT3369	1,000 lb	454 kg	
RT4069	800 lb	363 kg	
RT4769	800 lb	363 kg	
– Capacity on Deck Extension	300 lb	136 kg	
• No. Occupants (Indoor/Outdoor)			
RT2669	4/4		
RT3369	4/2		
RT4069	3/2		
RT4769	3/2		
• Lift/Lower Time			
RT2669	36/28 seconds		
RT3369	42/33 seconds		
RT4069	69/46 seconds		
RT4769	81/55 seconds		
• Maximum Drive Height	Full Height		
• Weight (single extension w/out leveling jacks)*			
RT2669	8,058 lb	3,655 kg	
RT3369	8,856 lb	4,017 kg	
RT4069	10,536 lb	4,779 kg	
RT4769	13,635 lb	6,185 kg	
• Drive Speed—Lowered	3.5 mph	5.6 km/h	
• Drive Speed—Elevated	0.5 mph	0.8 km/h	
• Max Tilt Rating (side-to-side)	2.5 Degrees		
• Max Tilt Rating (fore & aft)	3 Degrees		
• Gradeability			
RT2669	40%		
RT3369	40%		
RT4069	35%		
RT4769	30%		
• Turning Radius (Inside)	83"	2.1 m	
• Turning Radius (Outside)	175"	4.44 m	

\* Certain options or country standards will increase weight.  
\*\* RT4769 Includes a Push-Button Manual Descent System

### Preliminary version



### Standard Features

- 42 in/1.06 m Roll-out Deck Extension
- Nickel Plated Pins, Yellow Zinc-Chromate
- Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-Closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable \*\*
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Lug Tread Tires
- 220V-AC Receptacle In Platform
- All Motion Alarm
- Horn
- Hourmeter
- Proportional Lift and Drive
- Pin-based Load Sensing System
- Telematics-Ready Harness
- LCD Display with LiftSense System
- Fold Down Rails
- EN280 Compliant
- Moveable, Removable Platform Control Box

### Standard Specifications

• Tire Size	26 x 12 Foam Filled
• Diesel Engine	Kubota D1305-E4B 24.8 hp (18.5 kw)
• Fuel Tank Capacity	10 gal (38L)
• Drive	2WD Hydrostatic
• Hydraulic Reservoir	13.2 gal (50 L)

### Accessories & Options


- Hydraulic Leveling Jacks (Auto Level)
- Hydraulic Oil Cooler (Excludes RT4769)
- 26 x 12 Foam Filled Non-Marking Tires
- Dual Flashing Amber Beacon - LED
- White Noise Backup Alarm
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- QuikLevel Advanced
- Heavy Duty Pipe Racks
- 4 Wheel drive

# RT SERIES

## ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS

### Dimensions

All dimensions are approximate.

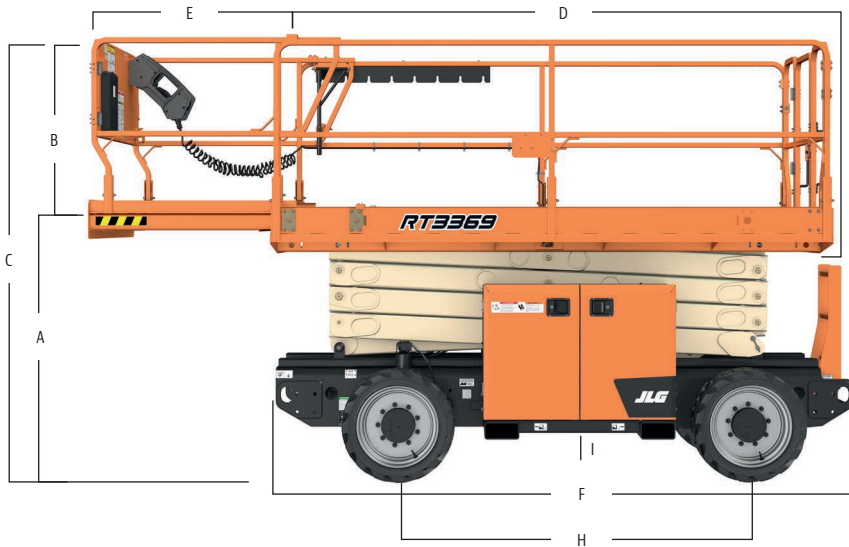

- Platform Height - Elevated

RT2669	26'2"	7.98 m
RT3369	32'8"	9.96 m
RT4069	40'3"	12.3 m
RT4769	47'	14.3 m

- A. Platform Height - Lowered

RT2669	4'3"	1.3 m
RT3369	4'9"	1.46 m
RT4069	4'10"	1.46 m
RT4769	5'4"	1.62 m

- B. Platform Railing Height\*

RT2669	44.7"	1.14 m
RT3369	44.7"	1.14 m
RT4069	44.7"	1.14 m
RT4769	44.7"	1.14 m

\* Fold Down Rails

- C. Overall Height

RT2669	96.7"	2.46 m
RT3369	102.9"	2.61 m
RT4069	103"	2.62 m
RT4769	109.1"	2.77 m

- D. Platform Dimensions

130.5" x 63" 3.3 x 1.6 m

- E. Platform Extension

42" 1.07 m

- F. Overall Machine Length

139" 3.53 m

- G. Overall Machine Width

69.3" 1.76 m

- H. Wheelbase

81.3" 2.07 m

- I. Ground Clearance

10.1" 25.7 cm

### Preliminary version



### IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



### JLG EMEA BV

Polaris Avenue 63  
2132 JH Hoofddorp  
The Netherlands  
Tel.: +31 (0)23 565 5665  
[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company