


BUILT FOR SAFETY. ENGINEERED FOR ANYTHING.

Ladders and scaffolding have peaked. These outdated tools simply cannot

Featuring game-changing maneuverability and a hands-free,

LOW-LEVEL ACCESS MACHINES ARE IDEAL SOLUTIONS FOR:

- * MECHANICAL & ELECTRICAL WORK
- + HVAC & DUCT WORK
- + DRYWALL WORK
- * CONSTRUCTION FINISHING WORK
- + FACILITIES MAINTENANCE
- + PAINTING
- + RETAIL REFIT & DISPLAY
- + CLEANING
- + DATA CENTERS
- * HEALTHCARE FACILITIES

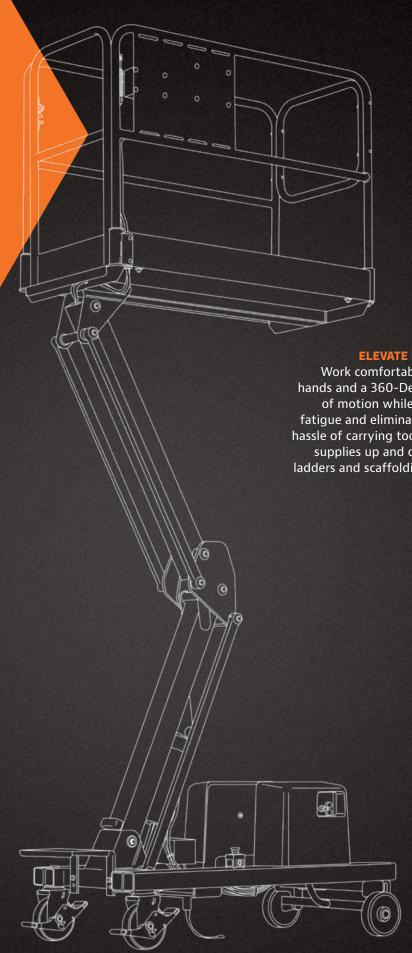

Enclosed platforms that can carry

up to 550-lbs and reach working heights up to 16-ft, low-level access from JLG sets a new bar for safety that ladders and scaffolding will never reach.

ELEVATE PRODUCTIVITY

Work comfortably with both hands and a 360-Degree range of motion while reducing fatigue and eliminating the hassle of carrying tools and supplies up and down ladders and scaffolding.

ELEVATE VERSATILITY

Low-level access lifts are lighter weight and have a smaller footprint, making them easier to maneuver around all areas of a job site or facility — no matter which model you choose.



ARE LADDERS WORTH IT?

500,000+
PEOPLE ARE TREATED FOR

PEOPLE ARE TREATED FOR LADDER - RELATED

IN JURIES
IN THE U.S. EVERY YEAR


Every time a ladder is used on your job site, you risk racking up thousands of dollars in injury compensation costs — not only due to falls from a surprisingly low distance of 7.5-ft (on average), but from ergonomic and overexertion injuries as well.

According to the Consumer Product Safety Commission, more than 500,000 people are treated for ladder-related injuries in the U.S. annually with the Bureau of Labor Statistics reporting that over 200,000 of those injuries are in the construction sector alone. Additionally, 25,000 of those cases are from slips, trips and falls. A separate study found that falls from height cost businesses approximately \$116,575 per injury in direct compensation. And when your workers are injured from overexerting their backs or from a fall, the study found that they're away for an average of 13 - 19 days — which means that meeting your deadline may be thrown out the window.

Even more unfortunate is that 34% of construction fatalities are a result of falls, many of which are from less than a 20-ft working height. The National Safety Council estimates that a fatal injury at work can cost your business approximately \$1.15 million per fatality.

SOURCES:

"Preventing Falls from Ladders in Construction," Harvard School of Public Health, Department of Environmental Health; "It's National Ladder Safety Month," National Institute for Occupational Safety & Health, March 13, 2017 by Peter Simeonov, PhD, and Sydney Webb, PhD; "Occupational Ladder Fall Injuries, United States," Centers for Disease Control & Prevention, April 25, 2014; injuryfacts.nsc.org/work/work-overview/top-work-related-injury-causes/; safetyequipment.org/knowledge-center-items/2017-liberty-mutual-workplace-safety-index; rentalpulse.com/Articles/tabid/246/Articleld/6886; bls.gov



FALLS FROM HEIGHT COST BUSINESSES APPROX.

\$116,575 PER INJURY









DUE TO INJURY FROM FALL

CONSTRUCTION FATALITIES



A FATAL INJURY AT WORK COSTS BUSINESSES APPROX.




PER FATALITY

ONCE YOU START ADDING IT UP, YOU NEED TO ASK YOURSELF:

ARE LADDERS WORTH THE RISK?



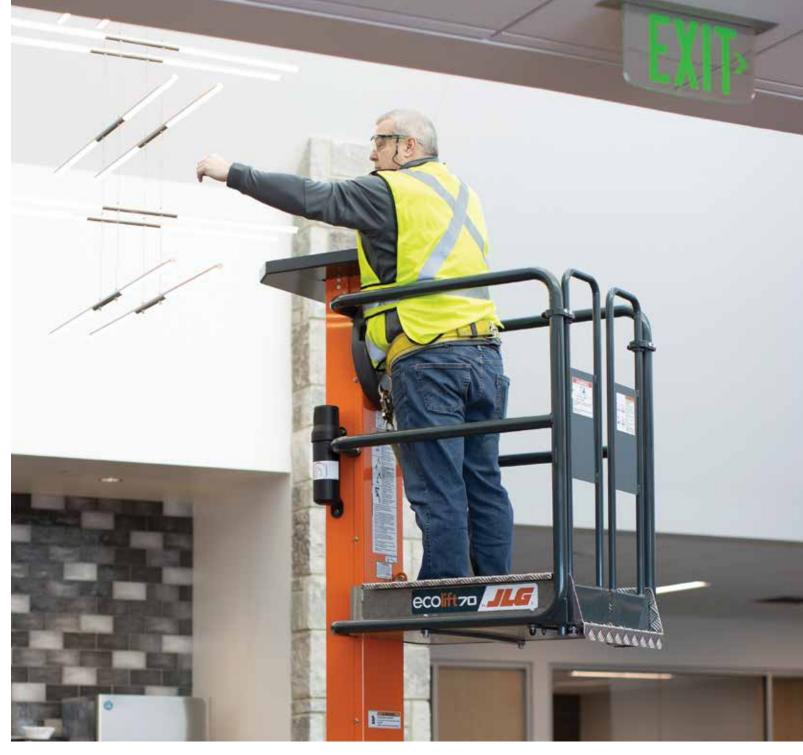

AT YOUR SERVICE

With no hydraulics or batteries, the EcoLift requires less routine maintenance than other machines delivering more uptime and reducing overall total cost of ownership.

GET A MOVE ON

Lightweight, with a narrow 27.5-in width that fits through single doorways, the EcoLift can be maneuvered effortlessly by anyone wherever work needs to get done.

POWER-FREE OPERATION

The EcoLift's patented, stored power lift/lower system lets you elevate with just the turn of a flywheel, offering 24/7 use that's virtually maintenance free.

CHOICE OF TWO MODELS

From the EcoLift 50's working height of 11-ft to the EcoLift 70's working height of 13-ft, either lift will help you handle your work with ease.

THE STRONG, SILENT TYPE

Sturdy base and automatic locking wheels let you work confidently with both hands.

Standard Features

- NO BATTERIES OR HYDRAULIC OIL FOR CLEAN, QUIET OPERATION
- + AUTO-LOCK BRAKE ON ELEVATION
- + TOOL TRAY
- FORKLIFT POCKETS
- + SALOON-STYLE DOORS

Optional Accessories

- MAINTENANCE TRAY WITH ANCHOR POINTS
 TO TETHER TOOLS
- STEEL TRAY (OPTIONAL FOR ECOLIFT 50, STANDARD ON ECOLIFT 70)





READY. SET. WORK.

No set-up time required. Once in position, simply lock the caster wheels, press a button to elevate and get more done.

STREAMLINED SERVICE

Innovative flip up and self-supporting platform, combined with neatly packaged components, allow for no-fuss service access.

POWER LIFTER

Powered by a maintenance-free, 12V DC AGM battery for lower cost of ownership and increased cycle life to handle heavy-duty applications.

Standard Features

- + AUTO-LOCK WHEELS ON ELEVATION
- * NON-MARKING CASTER WHEELS
- + HEAVY-DUTY ALUMINUM PLATFORM
- + PROTECTIVE WALL BUMPERS
- + TOOL TRAY
- + FRAME-MOUNTED BUBBLE LEVEL
- + INTEGRATED FORK POCKETS

Optional Accessories

* MAINTENANCE TRAY WITH ANCHOR POINTS TO TETHER TOOLS

GET MORE DONE

The 1030P features a sizable 30-in x 60-in platform that carries up to 550-lbs, allowing you to complete any number of tasks as high as 16-ft without repositioning.

TRIPLE THREAT

It has power. It has workspace. And measuring at just 30-in wide, it has the maneuverability to pass through single doorways with ease.

SAFETY ON AUTOPILOT


The enclosed platform with self-closing gate and auto-locking wheels provides unmatched security and confidence allowing the operator to keep their focus where it belongs.

Standard Features

- + AUTO-LOCKING WHEELS ON ELEVATION
- + LOAD SENSING SYSTEM
- * NON-MARKING WHEELS
- + FRAME-MOUNTED BUBBLE LEVEL
- * INTEGRATED FORK POCKETS
- + SELF-CLOSING PLATFORM GATE
- + HEAVY-DUTY LIFTING CANTILEVER DESIGN



	EcoLift 50	EcoLift 70	830P	1030P
WORKING HEIGHT	11-ft / 3.33-m	13-ft / 4.03-m	14-ft / 4.32-m	16-ft 2-in / 4.9-m
PLATFORM HEIGHT	5-ft/1.50-m	7-ft/2.20-m	8-ft/2.49-m	10-ft 2-in / 3.1-m
STOWED HEIGHT	61-in / 1.55-m	76-in / 1.94-m	61.4-in / 1.56-m	72.8-in / 1.85-m
MACHINE WIDTH	27.5-in / 0.7-m	27.5-in / 0.7-m	29.5-in / 0.75-m	30-in / .76-m
MACHINE LENGTH	38.7-in / 0.98-m	50.3-in / 1.28-m	47-in / 1.19-m	63-in / 1.60-m
PLATFORM SIZE	28 x 24-in / 0.71 x 0.6-m	33 x 25-in / 0.85 x 0.65-m	39 x 29-in / 1 x 0.75-m	29.5 x 60-in / .75 x 1.52-m
CAPACITY	330-lb / 150-kg	330-lb / 150-kg	440-lb / 200-kg	550-lb / 249-kg
WEIGHT	397-lb / 180-kg	672-lb / 305-kg	628-lb / 285-kg	753-lb / 342-kg
MAX GROUND BEARING PRESSURE FRONT	160 psi	170 psi	173 psi	489 psi
MAX GROUND BEARING PRESSURE REAR	168 psi	75 psi	166 psi	321 psi
POWER SOURCE	n/a	n/a	Battery 12V 12O AMP-HR	Battery 12V 120 AMP-HR

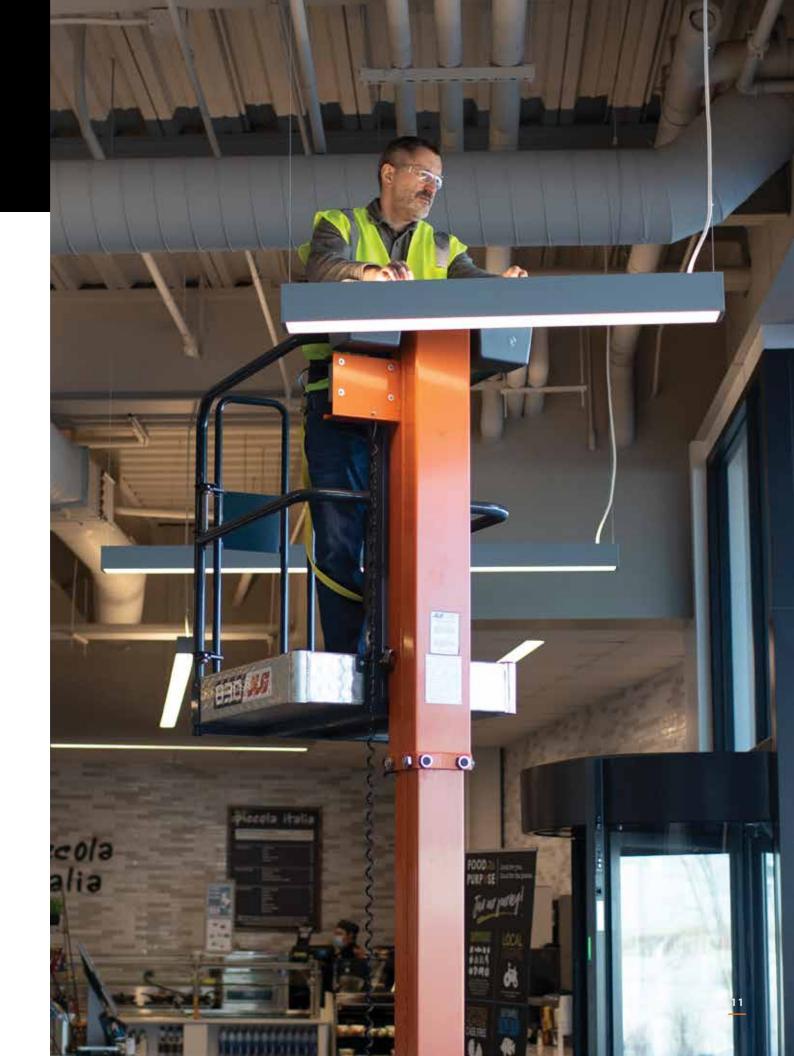



LADDERS & SCAFFOLDING HAVE PEAKED. IT'S TIME TO RAISE YOUR GAME.



JLG.com

Part No. 3132139 | R0521_2