

ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN
SCISSOR LIFT

SCISSOR LIFT



Performance

Platform Height—Elevated

ERT2669	8.0 m
ERT3369	10.0 m
ERT4069	12.3 m
ERT4769	14.3 m

Platform Capacity

ERT2669	680 kg
ERT3369	454 kg
ERT4069	363 kg
ERT4769	363 kg
— Capacity on Deck Extension	136 kg

No. Occupants (Indoor/Outdoor)

ERT2669	4/4
ERT3369	4/2
ERT4069	3/2
ERT4769	3/2

Lift/Lower Time

ERT2669	36/28 seconds
ERT3369	42/33 seconds
ERT4069	69/46 seconds
ERT4769	81/55 seconds

Maximum Drive Height

Full Height

Weight *

ERT2669	3,975 kg
ERT3369	4,510 kg
ERT4069	5,025 kg
ERT4769	6,905 kg

Drive Speed—Lowered

5.6 km/h

Drive Speed—Elevated

0.8 km/h

Gradeability

ERT2669	40%
ERT3369	35%
ERT4069	35%
ERT4769	30%

Turning Radius (Inside)

2 m

Turning Radius (Outside)

4 m

* Certain options or country standards will increase weight



Standard Specifications

Power Source

Drive (2WD)	AC Electric Drive
-------------	-------------------

Tyres

• Tyre size (non-marking)	26 x 12 Foam Filled
---------------------------	---------------------

Hydraulic System

• Hydraulic Reservoir	50 L
-----------------------	------

Standard Features

- Hydraulic Leveling Jacks (Auto Level)
- Roll-out Deck Extension
- Moveable, Removable Platform Console Box
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Self-locking Gate
- Flashing Amber Beacon - LED
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tyres
- 240V-AC Receptacle In Platform incl. ELCB
- 23 Amp Automatic, SCR Battery Charger
- 8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 310 Amp-Hour Batteries (ERT4069)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4769)
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- 2WD AC Drive System
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness

Accessories & Options

- 26 x 12 Foam Filled Lug Tread Tyres
- 8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4069)
- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- Generator Set (Kubota Stage V OC60-E4) 6hp (4.5kW)
- Heavy Duty Pipe Racks

ERT SERIES


ELECTRIC POWERED ROUGH TERRAIN
SCISSOR LIFT

SCISSOR LIFT



Dimensions

All dimensions are approximate.

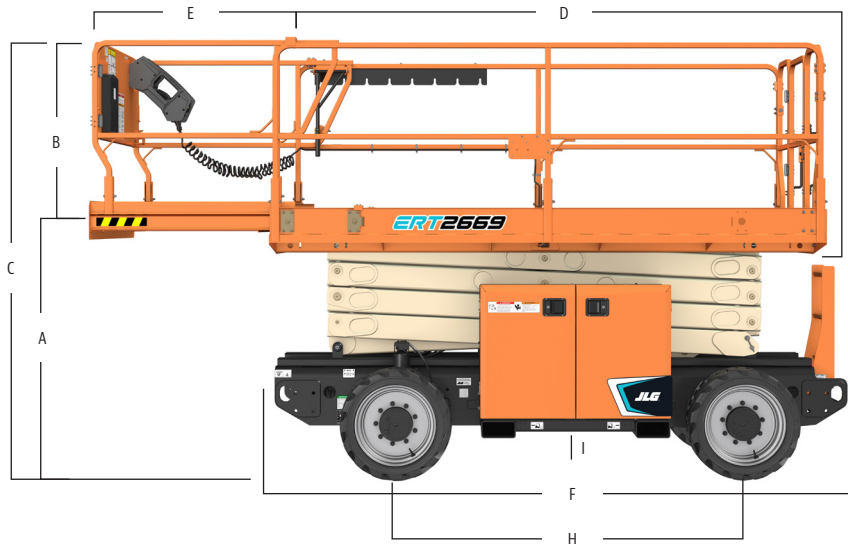

A. Platform Height – Lowered

ERT2669	1.30 m
ERT3369	1.46 m
ERT4069	1.46 m
ERT4769	1.62 m

B. Platform Railing Height*

	1.14 m
--	--------

C. Overall Height

ERT2669	
-Rails Up	2.46 m
-Rails Folded	1.89 m
ERT3369	
-Rails Up	2.61 m
-Rails Folded	2.05 m
ERT4069	
-Rails Up	2.62 m
-Rails Folded	2.05 m
ERT4769	
-Rails Up	2.77 m
-Rails Folded	2.21 m

D. Platform Dimensions

3.3 x 1.6 m

E. Platform Extension

1.07 m

F. Overall Machine Length

3.53 m

G. Overall Machine Width

1.76 m

H. Wheelbase

2.07 m

I. Ground Clearance

25.7 cm

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

R0324



JLG Industries (Australia)

358 Park Road
Regents Park, NSW 2143
Telephone 02 8718 6300
Fax 02 8718 6377
www.jlg.com.au

An Oshkosh Corporation Company